HOT AIR HAND DRYER WP1100



298 x 396 x 150 mm

- Hot air hand dryer in robust, germ-reducing and easycare stainless steel (AISI 304).
- All-stainless steel housing; all corners fully welded, visible surfaces satin finished and brushed with tapered glossy surface at the bottom.
 Further available surfaces: see below.
- Touch-free, low-failure capacitive sensor technology, sensor distance 0–30 cm, power cut-off after 30 s drying time.
- Low noise.
- SEV-tested and certified.

| Supply voltage | 230 V, 50 Hz |
|----------------------------------|--------------|
| Power rating | 2000 Watt |
| Heater power | 1915 Watt |
| Motor power | 85 Watt |
| Air output | 258 m³/h |

- Blower unit can be replaced as module.
- Mounting: With four screws through key holes and one optional anti-theft hole in the back wall.
- Delivery includes fixing material and device plug.
- Weight, including single package: 6.9 kg




Suggested text for specifications:

Hot air hand dryer in stainless steel (AISI 304) for surface mounting. All-stainless steel housing; all corners fully welded, visible surfaces satin finished and brushed with tapered glossy surface at the bottom. Low noise blower unit with capacitive sensor technology, sensor distance 0-30 cm, drying time 30 s factory setting, can be replaced as module. Power rating 2000 W. SEV-tested and certified. Delivery includes fixing material and device plug, mains cable supply on site 230 V/50 Hz.

Dimensions: 298 x 396 x 150 mm

Article No. WP1100

| Available surfaces | ID No. |
|-----------------------------------|-----------------|
| satin finished (standard) | 733 010 |
| highly polished | <i>7</i> 31 010 |
| (coloured) plastic powder-coating | 729 010 |

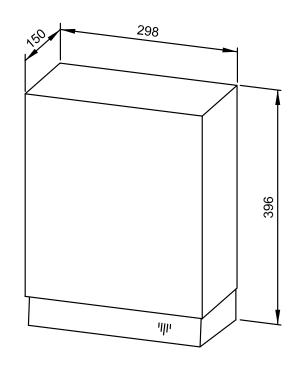

Ernst-Abbe-Straße 21 \cdot D-72770 Reutlingen \cdot Tel.: +49712151539-0 \cdot Fax: -20

info@wagner-ewar.de · www.wagner-ewar.de

